

Toll Free Help Line  
Ligne d'assistance en service à la clientèle  
800-531-0039

Let's make things better


PHILIPS

**PHILIPS CONSUMER ELECTRONICS COMPANY**  
A Division of Philips Electronics North America Corporation  
Knoxville, Tennessee 37914-1810, U.S.A.

English

Français


Español



## CLASS 1 LASER PRODUCT

3103 306 1751.1

Printed in Hong Kong IB8243T001 / VieAAb0039

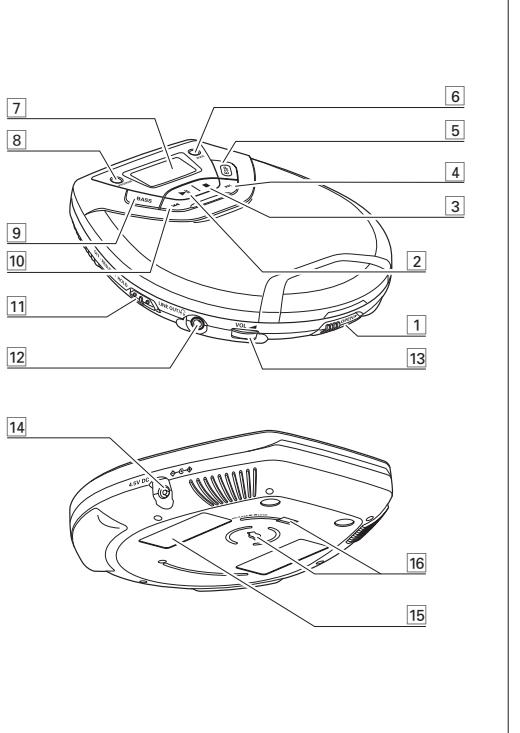

## QUICK START MISE EN SERVICE RAPIDE ENCENDIDO RÁPIDO



## English

### CONTROLS (see illustration in first column)

- 1 OPEN ► opens the CD compartment lid
- 2 ► starts the player on, starts or pauses CD play
- 3 ■ stops CD play, clears a program or switches the player off
- 4 ► skips and searches forward to CD tracks
- 5 ESP... electronic SKIP PROTECTION ensures continuous CD playback regardless of vibrations and shocks
- 6 MODE selects the different playing possibilities: SHUFFLE, SHUFFLE REPEAT ALL, REPEAT, REPEAT ALL and SCAN
- 7 ... display
- 8 PROGRAM programs tracks and reviews the program
- 9 BASS... switches the bass enhancement on and off. Also switches acoustic feedback (the beep) on/off when pressed for more than 2 seconds
- 10 ► skips and searches backward to CD tracks
- 11 RESUME stores the point at which CD playback last stopped
- 12 HOLD locks all buttons
- 13 LINE OUT/... 3.5 mm headphone jack, jack to connect the player to the audio input of an additional appliance, remote control jack (not on all versions)
- 14 VOL... adjusts the volume
- 15 4.5V DC... jack for external power supply
- 16 ... typeplate
- 17 ... belt clip holder

**CAUTION**  
Use of controls or adjustments or performance of procedures other than herein may result in hazardous radiation exposure.


### BATTERIES (supplied or optionally available)

With this player you can use either:  
 • normal batteries type LR6, UM3 or AA (preferably Philips), or  
 • alkaline batteries type LR6, UM3 or AA (preferably Philips).

**Notes:** Old and new or different types of batteries should not be combined.  
 - Remove batteries if they are empty or if the player is not going to be used for a long time.

### Inserting batteries

- 1 Push OPEN ► to open the CD compartment lid.
- 2 Open the battery compartment and insert either 2 normal or alkaline batteries.



### Battery indication

The approximate power level of your batteries is shown in the display.

- Battery full
- Battery two-thirds full
- Battery one-third full
- Battery dead or empty. When the batteries are dead or empty the symbol ■ flashes, and the beep tone sounds repeatedly.

### Average playing time of batteries under normal conditions

Type de pile	ESP on	ESP off
Normal	7 hours	6 hours
Alkaline	22 hours	19 hours

**Batteries contain chemical substances, so they should be disposed of properly.**


### POUCH AY 3266 (supplied or optionally available)

The pouch enables you to conveniently carry the CD player so you can listen to music while exercising. Before putting the player in the pouch, make sure ESP is activated. Put the player in the pouch with the keys facing away from your body, and close the flap. Do not use the pouch if you have a skin irritation; do not machine-wash the pouch as it could lose shape or color.

**Notes:** If there is no activity, the unit will automatically switch off to save energy.

### CD PLAYER AND CD HANDLING

- Do not touch the lens (A) of the CD player.
- Do not expose the unit, batteries or CDs to humidity, rain, sand or excessive heat (caused by heating equipment or direct sunlight).
- You can clean the CD player with a soft, slightly dampened, lint-free cloth. Do not use any cleaning agents as they may have a corrosive effect.
- To clean the CD, wipe it in a straight line from the center toward the edge using a soft, lint-free cloth. A cleaning agent may damage the disc! Never write on a CD or attach a sticker to it.
- The lens may cloud over when the unit is moved suddenly from cold to warm surroundings. Playing a CD is not possible then. Leave the CD player in a warm environment until the moisture has evaporated.
- Active mobile phones in the vicinity of the CD player may cause malfunctions.
- Avoid dropping the unit as this may cause damage.



### ENVIRONMENTAL INFORMATION

- All redundant packing material has been omitted. We have done our best to make the packaging easily separable into two materials: cardboard and polyethylene.
- Your unit consists of materials which can be recycled if disassembled by a specialized company. Please observe the local regulations regarding the disposal of packing materials, exhausted batteries and old equipment.


**The set complies with the FCC-Rules, Part 15 and with 21 CFR 1040.10.**  
**Operation is subject to the following two conditions:**  
 1. This device may not cause harmful interference, and  
 2. This device must accept any interference received, including interference that may cause undesired operation.

### PLAYBACK INFORMATION

- If a CD-Recordable (CD-R) or a CD-Rewritable (CD-RW) is not recorded properly, n/r ≠ 15°C is displayed; that case, use FINALIZE on your CD-recorder to complete the recording.
- If you want to play a CD-Rewritable (CD-RW), it takes 3–15 seconds for sound reproduction to start once you have pressed ►II.
- Playback will stop if you open the CD lid.
- While the CD is being read, ■■■■■ flashes in the display.

### VOLUME AND BASS

**Volume adjustment**  
Adjust the volume by using VOL.



**Bass adjustment**  
You can choose between the bass enhancement levels dB 1 and dB 2.

- 1 Press BASS as often as necessary to select the desired bass intensity.  
 → dB 1 or dB 2 is displayed for 2 seconds and DBB is shown.
- 2 To switch off dB 1 or dB 2, press BASS repeatedly.  
 → DBB disappears.

**Notes:**  
 - During SCAN searching is not possible.  
 - During SHUFFLE, SHUFFLE REPEAT ALL, REPEAT or while playing a program, searching is only possible within the particular track.

**Searching for a passage during playback**  
 1 Keep ■ or ► pressed to find a particular passage in a backward or forward direction.  
 → Searching is started and playback continues at low volume. After 2 seconds the search speed increases.  
 2 Release the button when you reach the desired passage.  
 → Normal playback continues from this position.

**Notes:**  
 - During SCAN searching is not possible.  
 - During SHUFFLE, SHUFFLE REPEAT ALL, REPEAT or while playing a program, searching is only possible within the particular track.

## French

### IMPORTANT SAFETY INSTRUCTIONS – Read before operating equipment

This product was designed and manufactured to meet strict quality and safety standards. There are, however, some installation and operation precautions which you should be particularly aware of.

1. **Read these instructions** – All the safety and operating instructions should be read before the appliance is operated.
2. **Keep these instructions** – The safety and operating instructions should be retained for future reference.
3. **Heed all warnings** – All warnings on the appliance and in the operating instructions should be adhered to.
4. **Follow all instructions** – All the operating and use instructions should be followed.
5. **Do not use this apparatus near water** – for example, near a bathtub, washbowl, kitchen sink, laundry tub, in a wet basement or near a swimming pool, etc.
6. **Clean only with a damp cloth**. The appliance should be cleaned only as recommended by the manufacturer.
7. **Install in accordance with the manufacturer's instructions**. Do not block any of the ventilation openings. For example, the appliance

should not be situated on a bed, sofa, rug, or similar surface or placed in a built-in installation, such as a bookcase or cabinet that may impede the flow of air through the ventilation openings.

## Français

### COMMANDES (voir illustration dans la première colonne)

- 1 OPEN ► ouvre le couvercle du lecteur
- 2 ►II... allume le lecteur, démarre ou interrompt la lecture CD
- 3 ■ arrête la lecture CD, efface la programmation du CD ou éteint le lecteur
- 4 ►II... avance d'une piste sur le CD ou effectue une recherche vers l'avant
- 5 ESP... ELECTRONIC SKIP PROTECTION assure une lecture continue du CD, indépendamment des vibrations et des chocs
- 6 MODE sélectionne l'une des possibilités de lecture : SHUFFLE, SHUFFLE REPEAT ALL, REPEAT, REPEAT ALL et SCAN
- 7 ... affichage
- 8 PROGRAM programmes pistes et revient au programme
- 9 BASS... change le niveau de basse
- 10 ►II... recherche une piste sur les pistes CD
- 11 RESUME enregistre la dernière position de lecture d'une piste de CD
- 12 HOLD verrouille toutes les touches
- 13 LINE OUT/... 3.5 mm jack pour écouteurs, jack pour connecter le lecteur à un autre appareil
- 14 VOL... ajuste le volume
- 15 4.5V DC... connecteur pour alimentation externe
- 16 ... support à ceinture

sur un canapé, un lit, un tapis, ou autre surface du même type ; il ne doit pas non plus être placé dans un meuble intégré comme une bibliothèque ou autre système de ventilation de l'appareil ou système de climatisation.

## Español

### CONSIGNES DE SÉCURITÉ IMPORTANTES – A lire avant toute utilisation du matériel

Ce produit a été conçu et fabriqué en accord avec des normes de sécurité et de qualité très strictes. Il existe toutefois certaines précautions d'utilisation et de fonctionnement qui il est important de connaître et de respecter.

1. **Lisez ces instructions** – Il est imprévisible de lire toutes les consignes de sécurité et les instructions de fonctionnement avant d'utiliser l'appareil.
2. **Conservez ces instructions** – Il est recommandé de conserver ces consignes de sécurité et instructions de fonctionnement pour référence ultérieure.
3. **Respectez les avertissements** – Tous les avertissements inscrits sur l'appareil lui-même ou figurant dans les instructions de fonctionnement doivent être respectés.
4. **Suivez toutes les instructions** – Il est impératif de suivre toutes les instructions de fonctionnement de l'appareil : SHUFFLE, SHUFFLE REPEAT ALL, REPEAT, REPEAT ALL et SCAN
5. **N'utilisez pas cet appareil près d'une source de chaleur** comme par exemple des radiateurs, bouches de chaleur, cuisinières, ou autres appareils (même des amplificateurs) dégagent de la chaleur.
6. **Utilisez uniquement des accessoires ou options recommandés par le fabricant**
7. **Utilisez uniquement un meuble sur roulettes** ou support, un pied, une étagère ou une table de type recommandé par le fabricant. Si vous utilisez un meuble sur roulettes, veiller à déplacer avec précaution afin d'éviter tout accident.
8. **Pour toute réparation, faites appeler à un personnel qualifié**. Une réparation sera nécessaire si l'appareil a subi des dommages tels que détérioration du cordon d'alimentation ou de la prise, liquide renversé sur l'appareil, ou encore si un objet a tombé dessus, si l'appareil a été exposé à la pluie ou à l'humidité, s'il ne fonctionne pas correctement ou s'il a fait une chute.

11. Pour toute réparation, faites appeler à un personnel qualifié. Une réparation sera nécessaire si l'appareil a subi des dommages tels que détérioration du cordon d'alimentation ou de la prise, liquide renversé sur l'appareil, ou encore si un objet a tombé dessus, si l'appareil a été exposé à la pluie ou à l'humidité, s'il ne fonctionne pas correctement ou s'il a fait une chute.

12. Lorsque vous débranchez l'appareil, débranchez tous les câbles de l'appareil.

13. Utilisez toujours une prise de courant correcte.

14. N'utilisez pas cet appareil près d'un feu ouvert, par exemple, une baignoire, un lavabo, un évier de cuisine, un baquet de lingerie, ou dans une cave humide, près d'une piscine, etc.

15. Nettoyez l'appareil uniquement avec un chiffon humide. - Cet appareil doit être nettoyé uniquement selon la procédure recommandée par le fabricant.

16. Installez l'appareil selon les instructions du fabricant. N'obstruez aucun orifice de ventilation. - Par exemple, l'appareil ne doit pas être posé

sur un canapé, un lit, un tapis, ou autre surface du même type ; il ne doit pas non plus être placé dans un meuble intégré comme une bibliothèque ou système de ventilation de l'appareil ou système de climatisation.

17. Pour toute réparation, faites appeler à un personnel qualifié. Une réparation sera nécessaire si l'appareil a subi des dommages tels que détérioration du cordon d'alimentation ou de la prise, liquide renversé sur l'appareil, ou encore si un objet a tombé dessus, si l'appareil a été exposé à la pluie ou à l'humidité, s'il ne fonctionne pas correctement ou s'il a fait une chute.

18. Utilisez uniquement un meuble sur roulettes ou support, un pied, une étagère ou une table de type recommandé par le fabricant. Si vous utilisez un meuble sur roulettes, veiller à déplacer avec précaution afin d'éviter tout accident.

19. Pour toute réparation, faites appeler à un personnel qualifié. Une réparation sera nécessaire si l'appareil a subi des dommages tels que détérioration du cordon d'alimentation ou de la prise, liquide renversé sur l'appareil, ou encore si un objet a tombé dessus, si l'appareil a été exposé à la pluie ou à l'humidité, s'il ne fonctionne pas correctement ou s'il a fait une chute.

20. Utilisez uniquement un meuble sur roulettes ou support, un pied, une étagère ou une table de type recommandé par le fabricant. Si vous utilisez un meuble sur roulettes, veiller à déplacer avec précaution afin d'éviter tout accident.

21. Pour toute réparation, faites appeler à un personnel qualifié. Une réparation sera nécessaire si l'appareil a subi des dommages tels que détérioration du cordon d'alimentation ou de la prise, liquide renversé sur l'appareil, ou encore si un objet a tombé dessus, si l'appareil a été exposé à la pluie ou à l'humidité, s'il ne fonctionne pas correctement ou s'il a fait une chute.

22. Utilisez uniquement un meuble sur roulettes ou support, un pied, une étagère ou une table de type recommandé par le fabricant. Si vous utilisez un meuble sur roulettes, veiller à déplacer avec précaution afin d'éviter tout accident.

23. Utilisez uniquement un meuble sur roulettes ou support, un pied, une étagère ou une table de type recommandé par le fabricant. Si vous utilisez un meuble sur roulettes, veiller à déplacer avec précaution afin d'éviter tout accident.

24. Utilisez uniquement un meuble sur roulettes ou support, un pied, une étagère ou une table de type recommandé par le fabricant. Si vous utilisez un meuble sur roulettes, veiller à déplacer avec précaution afin d'éviter tout accident.

25. Utilisez uniquement un meuble sur roulettes ou support, un pied, une étagère ou une table de type recommandé par le fabricant. Si vous utilisez un meuble sur roulettes, veiller à déplacer avec précaution afin d'éviter tout accident.

26. Utilisez uniquement un meuble sur roulettes ou support, un pied, une étagère ou une table de type recommandé par le fabricant. Si vous utilisez un meuble sur roulettes, veiller à déplacer avec précaution afin d'éviter tout accident.

27. Utilisez uniquement un meuble sur roulettes ou support, un pied, une étagère ou une table de type recommandé par le fabricant. Si vous utilisez un meuble sur roulettes, veiller à déplacer avec précaution afin d'éviter tout accident.

28. Utilisez uniquement un meuble sur roulettes ou support, un pied, une étagère ou une table de type recommandé par le fabricant. Si vous utilisez un meuble sur roulettes, veiller à déplacer avec précaution afin d'éviter tout accident.

29. Utilisez uniquement un meuble sur roulettes ou support, un pied, une étagère ou une table de type recommandé par le fabricant. Si vous utilisez un meuble sur roulettes, veiller à déplacer avec précaution afin d'éviter tout accident.

30. Utilisez uniquement un meuble sur roulettes ou support, un pied, une étagère ou une table de type recommandé par le fabricant. Si vous utilisez un meuble sur roulettes, veiller à déplacer avec précaution afin d'éviter tout accident.

31. Utilisez uniquement un meuble sur roulettes ou support, un pied, une étagère ou une table de type recommandé par le fabricant. Si vous utilisez un meuble sur roulettes, veiller à déplacer avec précaution afin d'éviter tout accident.

32. Utilisez uniquement un meuble sur roulettes ou support, un pied, une étagère ou une table de type recommandé par le fabricant. Si vous utilisez un meuble sur roulettes, veiller à déplacer avec précaution afin d'éviter tout accident.

33. Util

## English

### CLIP CEINTURE CINTURÓN DE CIERRE

#### PROGRAMMING TRACK NUMBERS

You can select up to 30 tracks to play in a program. A single track may be played more than once in the program.

- 1 While playback is stopped, select a track with **<>** or **>>**.
- 2 Press **PROGRAM** to store the track. **PROGRAM** lights; the track number programmed and **P:**, with the total number of stored tracks, are displayed.
- 3 Select and store all desired tracks in this way.
- 4 Press **PROGRAM** to start playback of your selected tracks. **PROGRAM** is shown and playback starts.
- You can review the program by pressing **PROGRAM** for more than 2 seconds. The display shows all stored tracks in sequence.

*Notes: - If you press **PROGRAM** and no track is selected, **S E L E C T** is displayed.  
- If you try to store more than 30 tracks, **F U L L** is displayed.*

#### CLEARING THE PROGRAM

- 1 If necessary, press **■** to stop playback.
- 2 Press **■** to clear the program. **C L E A R** is displayed once, **PROGRAM** disappears, and the program is cleared.

*Notes: The program also will be cleared if:  
- the power supply, or  
- open the CD compartment lid, or  
- if the unit switches off automatically.*

#### RESUME

You can store the position at which playback stopped last. When restarting, playback continues from where you have stopped.

- 1 Switch the slider to **RESUME** during playback to activate **RESUME**. **RESUME** is shown.
- 2 Press **■** whenever you want to stop playback.
- 3 Select and store all desired tracks in this way.
- 4 Press **■** to start playback of your selected tracks. **PROGRAM** is shown and playback starts.
- You can review the program by pressing **PROGRAM** for more than 2 seconds. The display shows all stored tracks in sequence.

*Notes: - If you press **PROGRAM** and no track is selected, **S E L E C T** is displayed.  
- If you try to store more than 30 tracks, **F U L L** is displayed.*

#### HOLD

You can lock the keys of the unit. When a key is then pressed, no action will be executed.

- 1 Switch the slider to **HOLD** to activate **HOLD**. All keys are locked. **HOLD** is displayed if you press any key. If the unit is switched off, **HOLD** is displayed only if you press **■**.
- 2 To deactivate **HOLD**, switch the slider to **OFF**.

#### ESP

##### IN-CAR USE (connections supplied or optionally available)

#### With a conventional portable CD-player

You might have experienced that the music stopped e.g. when you were jogging. The **ELECTRONIC SKIP PROTECTION** prevents loss of sound caused by light vibrations and shocks. Continuous playback is ensured.

However, ESP does not prevent playback interruptions during vigorous running. It also does not protect the unit against any damage caused by dropping!

#### With the AY 3545 car voltage converter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3501 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

Only use the AY 3545 car voltage converter (4.5 V DC, positive pole to the center pin) and the AY 3501 car cassette adapter. Any other product may damage the unit.

#### With the AY 3545 car cassette adapter

<div data-bbox="247 1261 260